

WORKSTATION OXFORD HCR

Robust, practical & *effortless*.


.....



Robust, practical & effortless.



Scan the QR code to see this product on our website or [click here](#)

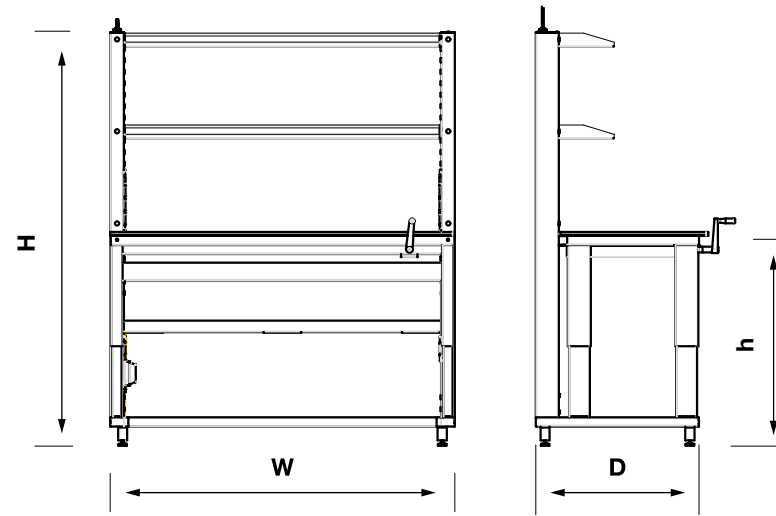

W (width, mm)	D (depth, mm)	h (worktop height, mm)	H (column height, mm)
1.500	750	ADJUSTABLE	1.570
1.200	900	650 to 925	1.800
900			

MAX Load 350 Kg

Power supply side can be switched left to right and viceversa. Check **accessories** pages to see how shelves can be added, removed and changed position.

- Underbench shelf available.
- Gas taps can be attached to column.
- Some other options available.
- In addition, special accessory attachments can be design and manufactured on demand.

Base frame fully welded steel, epoxy coated 9010 (check other options).

Worktop frame fully welded steel, mounted on telescopic elevation system based on hydraulic actuators, operated from a detachable crank at front face of underworktop's beam. **Provided with M5 nuts below worktop** for accesories and attachments.

Columns manufactured in steel tube bolted to main frame, epoxy coated 9010 (check other options) with **M8 nuts at internal faces** for accesories. **Nuts in front faces as an option.**

Worktop material on demand. Advised HPL 16 mm high chemical resistance.

Feet, articulated with rubber base, interchangeable with combi castor-foot.

Data setup on demand, advised to be magnet clip-routed.

Electrical setup 8 power sockets installed (3 each side above worktop, 1 each side below worktop).
Circuit breaker setup on demand.

