

# WORKSTATION OXFORD ELC

*Power under control.*

---




In partnership with:





Scan the QR code to see this product on our website or [click here](#)

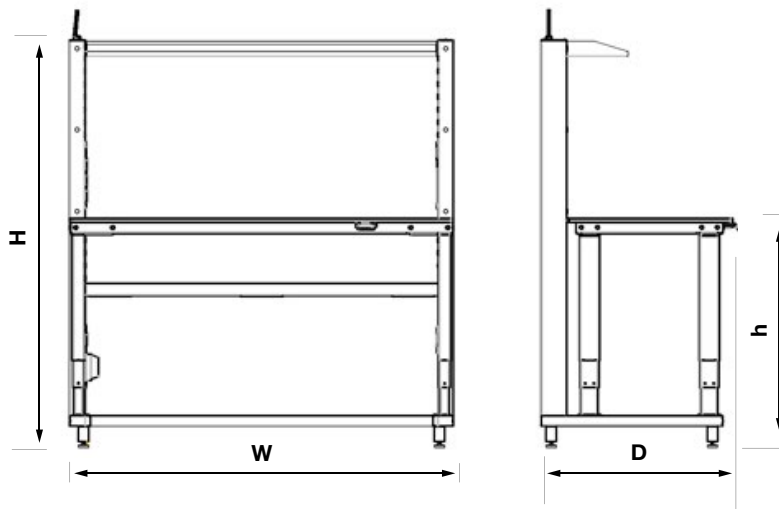

W (width, mm)	D (depth, mm)	h (worktop height, mm)	H (column height, mm)
1500	750 / 900	ADJUSTABLE	1600 / 1800
1200	750 / 900	700 to 925	1600 / 1800
900	750 / 900		1600 / 1800

### Max recommended load - 300 kg

Power supply side can be switched left to right and viceversa. Check accessories pages to see how shelves can be added, removed and changed position.

- Underbench shelf available.
- Gas taps can be attached to column.
- Some other options available.
- In addition, special accessory attachments can be design and manufactured on demand.

Data setup on demand, advised to be magnet clip-routed.

Electrical setup 9 power sockets installed (3 each side above worktop, 1 each side below worktop and 1 additional for elevation system).  
Circuit breaker setup on demand .

Base frame fully welded steel, epoxy coated 9010 or 9016 (check other options).

Worktop frame fully welded steel, mounted on Linak® telescopic elevation system based on DL 16 lifting columns (available in white 9016\*, grey 9006 or black 9005), operated from control panel at desk front or from Linak® Desk Control™ app from a smart device.

Equipped with Linak® PIEZO™ Anti-Collision™ featuring an integrated sensor that minimises the risk of damage to the desk, caused by squeezing or blocking during upward or downward movement.

Provided with M5 nuts below worktop for accessories and attachments.

Columns manufactured in steel tube bolted to main frame, epoxy coated 9010 or 9016 (check other options) with M8 nuts at internal faces for accessories. Nuts in front faces as an option.

Worktop material on demand. Advised HPL 16 mm high chemical resistance.

Feet, articulated with rubber base, interchangeable with combi castor-foot.

\*Actuators white 9016 installed in frame epoxy coated 9010 may produce white mismatch.

**Typical connection to ceiling options:**

- CE connector plug
- UK plug
- Schuko plug
- Thorsman plug

**M8 capped nuts for shelving and accesories, 70x50 mm pattern.**

Quantity depends on column height.

**Shelf back is distanced from column back to allow for hosing, data cabling, or equipment cabling to run from top to worktop level.**

**(x3) M8 capped nuts for accesories & attachments, at front face of columns.**

**Most standard outlets available. 8 outlets per workstation:**

3 outlets at each side above worktop. 1 outlet at each side below worktop.

**Bench can be supplied with a circuit breaker set mounted below worktop at left column (custom setup per project)**


**HPL      Ceramic      Stainless steel**

Some examples of **worktop materials.**

**Leveling feet and Combi castor-foot are interchangeable**

*Leveling feet*      *Combi castor-foot*

**(12x) M5 nuts provided below worktop, in pairs distanced 95 mm between axis (distance between pairs depends on bench size).**

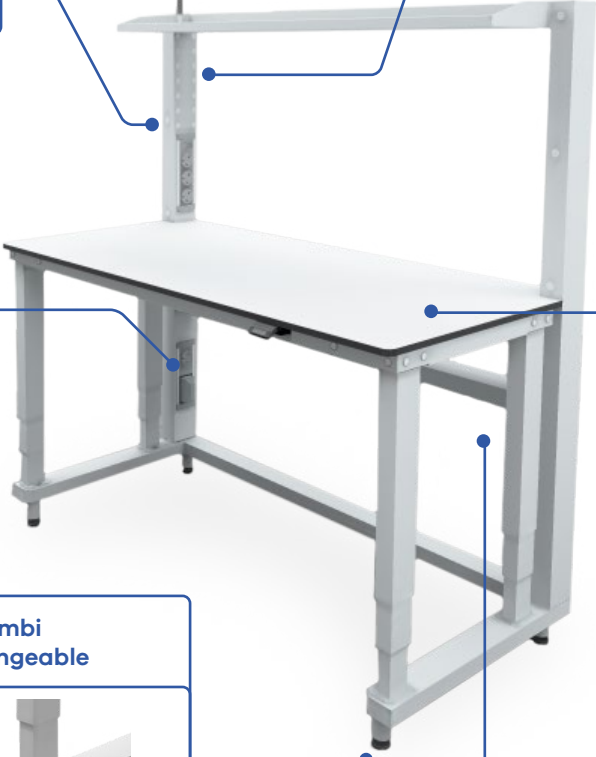



**Worktop height can be changed dynamically** from control panel at desk front, or from available app from a smartphone.



LINAK® Desk Control™ App (left) & LINAK® Desk Panel (right)

# Technical Data Sheets

Visit our  
website for  
more info



[www.ibr-innovasystem.com](http://www.ibr-innovasystem.com)

Contact us at: [hello@ibr-innovasystem.com](mailto:hello@ibr-innovasystem.com)

