WORKSTATION
OXFORD ELC

Power under control.



In partnership with:

LINAK®
WE IMPROVE YOUR LIFE

IBR
InnovaSystem


Oxford ELC

Power under control.

In partnership with:

LINAK® WE IMPROVE YOUR LIFE

Scan the QR code to see this product on our website or click here

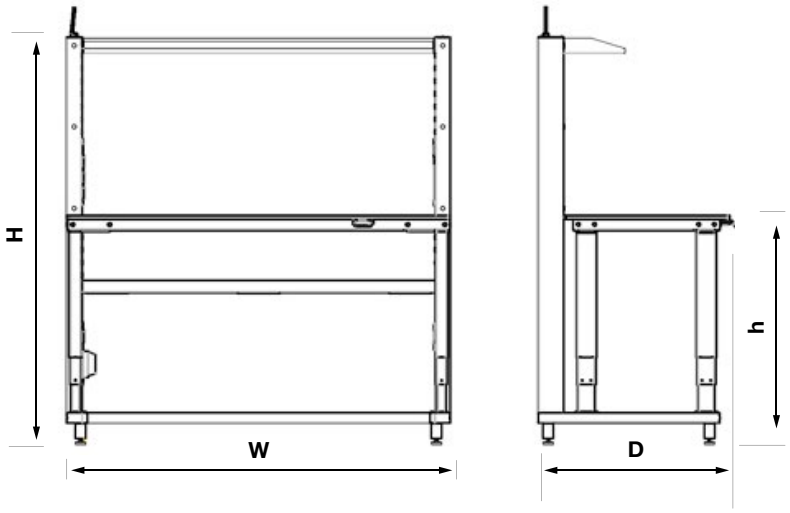

W (width, mm)	D (depth, mm)	h (worktop height, mm)	H (column height, mm)
1.500	750 / 900	ADJUSTABLE 700 to 1.350	1.600 / 1.800
1.200	750 / 900		1.600 / 1.800
900	750 / 900		1.600 / 1.800

Max recommended load - 300 kg

Power supply side can be switched left to right and viceversa. Check **accesories pages to see how shelves can be added, removed and changed position.**

- **Underbench shelf** avalaible.
- **Gas taps** can be attached to column.
- Some **other options avalaible**.
- In addition, **special accesory attachments can be design and manufatured on demand.**

Data setup on demand, advised to be magnet clip-routed.

Electrical setup 9 power sockets installed (3 each side above worktop, 1 each side below worktop and 1 additional for elevation system). **Circuit breaker** setup on demand .

Base frame fully welded steel, epoxy coated 9010 or 9016 (check other options).

Worktop frame fully welded steel, mounted on **Linak®** telescopic elevation system **based on DL 16 lifting columns** (available in white 9016*, grey 9006 or black 9005), **operated** from **control panel at desk front or from Linak® Desk Control™** app from a smart device.

Equipped with **Linak® PIEZO™ Anti-Collision™** featuring an **integrated sensor** that **minimises the risk of damage to the desk,** caused by squeezing or blocking during upward or downward movement.

Provided with M5 nuts below worktop for accesories and attachments.

Columns manufactured in steel tube bolted to main frame, **epoxy coated 9010 or 9016** (check other options) with **M8 nuts at internal faces** for accesories. **Nuts in front faces as an option.**

Worktop material on demand. Advised HPL 16 mm high chemical resistance.

Feet, articulated with rubber base, interchangeable with combi castor-foot.

*Actuators white 9016 installed in frame epoxy coated 9010 may produce white mismatch.

Typical connection to ceiling options:


- **CE** connector plug
- **Schuko** plug
- **UK** plug
- **Thorsman** plug




M8 capped nuts for shelving and accesories, 70x50 mm pattern.

Quantity depends on column height.

Shelf back is distanced from column back to allow for hosing, data cabling, or equipment cabling to run from top to worktop level.

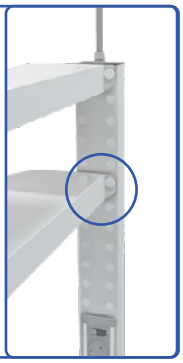


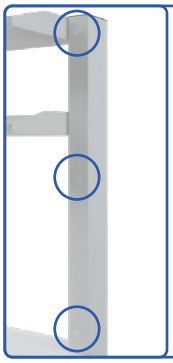


(x3) M8 capped nuts for accesories & attachments, at front face of columns.



Bench can be supplied with a circuit breaker set mounted below worktop at left column (custom setup per project)

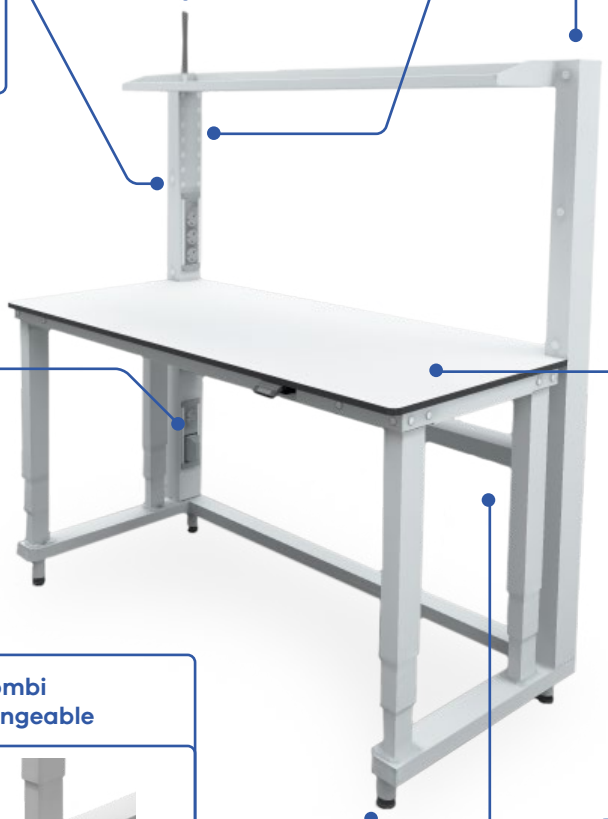



Most standard outlets available. 8 outlets per workstation: 3 outlets at each side above worktop. 1 outlet at each side below worktop.

HPL | **Ceramic** | **Stainless steel**



Some examples of **worktop materials.**

Leveling feet and Combi castor-foot are interchangeable



Leveling feet




Combi castor-foot

(12x) M5 nuts provided below worktop, in pairs distanced 95 mm between axis (distance between pairs depends on bench size).



Worktop height can be changed dynamically from control panel at desk front, or from available app from a smartphone.

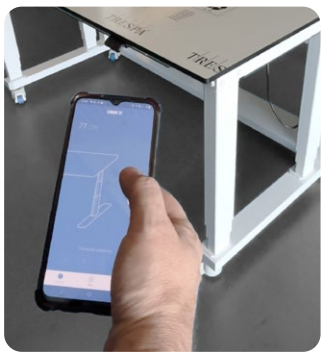



LINAK® Desk Control™ App (left)
& LINAK® Desk Panel (right)

© IBR Innovación S.L. – All rights reserved. Partial or total reproduction of this catalog is strictly prohibited.
See full legal notice in this document.

IBR InnovaSystem

Technical Data Sheets

Visit our website for more info

www.ibr-innovasystem.com

Contact us at: hello@ibr-innovasystem.com

IBR InnovaSystem

© IBR Innovación S.L. – All rights reserved. Partial or total reproduction of this catalog is strictly prohibited.
See full legal notice in this document. Rev: 12-06-26.